


TECHNICAL DATASHEET

PEFS C6 / F3 / F3N LOP Solenoid Valve Assembly

Features

The Chubb PEFS C6 / F3 / F3N LOP Solenoid Valve Assembly features:

- Australian Standard compliant to AS5062
- Brass Valve with removeable solenoid
- Viton Seals
- Foil rupture outlet to prevent ingress of dirt

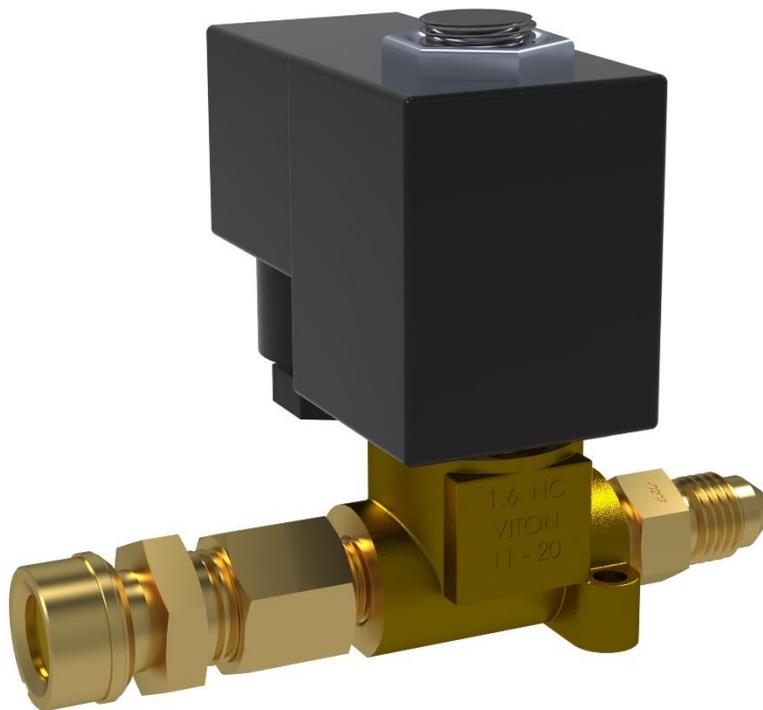

PEFS C6
Vehicle Fire Suppression System

PEFS F3
Vehicle Fire Suppression System


PEFS F3N
Vehicle Fire Suppression System

Chubb Fire & Security Pty Ltd
13 15 98
www.chubb.com.au

ABN 47 000 067 541

Chubb

Specifications

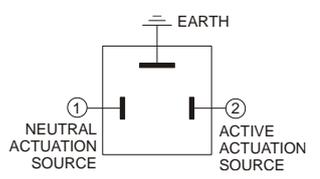Part Number	ES9014-D
Function	2 Way Normally Closed (NC)
Ports	1/8" BSP
Valve Orifice	1.6mm
Maximum Pressure	1700kPa
Temperature Range	-10°C to 50°C ambient
Seals	Viton
Coil voltage	12V ± 10% DC 10W
Protection Class	IP65 with connector
Connections	

Service Requirements

Service in accordance with the relevant PEFS Maintenance Manual and Australian Standard AS5062.

Rupture Nozzle should be replaced after use or if foil shows signs of damage and or corrosion.

Spare Parts List

