

AACULP (Artikelnummer 22-11810-100)

Alarmline II Analogue LHD Control Unit - PC Programmable

Allgemein

The AACULP is a PC programmable, Analogue Liner Heat Detection (LHD) cable control unit. It provides monitoring for any of the Alarmline II range of LHD sensor cable, configuration of alarm and pre-alarm temperatures as well as enabling simple interface to a main fire alarm or BMS system.

Interface & Programming

The AACULP provides LED indications only and requires a PC to configure the control unit.

Pre-Alarm and Alarm thresholds can be set through simple menu options with no need for any graphs or nomograms. Initial set-up is done by measuring and entering the calibration resistance of the sensor cable removing the need to know the sensor cable length.

Volt free changeover contacts are provided inside the control unit for Pre-Alarm and Alarm signaling to a main fire alarm control panel or BMS system. A failsafe opto-isolated phototransistor fault output is also provided.

No user controls are provided on the control unit. An isolated input is provided enabling remote reset functionality.

Einsatz

As well as monitoring the LHD sensor cable for changes in temperature, the control unit also monitors for open and short circuit faults along the cable ensuring notification if the cable becomes damaged. It is fitted with its own internal temperature monitor and should the temperature within the controller enclosure reach 100°C (212°F), an alarm will be signaled.

Each control unit may have up to 500m (1640ft) of LHD sensor cable connected to it, acting as a single detection zone. When the LHD sensor cable and the control unit are installed in different areas, a suitable interposing cable can be used to make the electrical connection between them.



Details

- UL521 and CE approval, UL/ULC listed
- Up to 500m of sensor cable per zone
- Separate pre-alarm and alarm signals
- Easy programmable interface
- Enclosure temperature alarm
- IP66 rated enclosure
- No nomograms or charts required

AACULP (Artikelnummer 22-11810-100)

Alarmline II Analogue LHD Control Unit - PC Programmable

Technische Daten

Elektrische Angaben

Betriebsspannung	20 to 28 VDC
Aktueller Verbrauch	<40 mA

Physikalische Angaben

Abmessungen	182 x 180 x 90 mm (7 1/8" x 7 1/8" x 3 1/2") (W x H x D)
Nettogewicht	735 g
Farbe	Hellgrau

Material	Polycarbonat
----------	--------------

Umweltbedingungen

Betriebstemperatur	0 to +50°C
Relative Luftfeuchtigkeit	0 to 95% max. noncondensing, 75% for <75 m cable & 54°C alarm setting
Umgebung	Innen, Außen
IP Klassifizierung	IP66

Standards & Zertifizierungen

Zertifizierung	CE, UL
----------------	--------

Operating voltage

20 – 28VDC

Current consumption

Quiescent	<40mA
Fault	<40mA
Pre-Alarm	<50mA
Alarm	<50mA
Pre-alarm & alarm	<70mA

Outputs

Pre-Alarm (Form C relay 2A @ 30VDC / 0.25A @ 250VAC (62.5VA)
resistive load)

Alarm (Form C relay 2A @ 30VDC / 0.25A @ 250VAC (62.5VA)
resistive load)

Fault (Opto-isolated phototransistor output)
Max.

Inputs

Remote reset (isolated) 20-28VDC
5s pulse

Zone length

30.5m to 500m (100ft to 1640ft)

Mechanische Angaben

Material	Polycarbonate
Colour	Light grey
Weight	735g
Dimensions (W x H x D)	182 x 180 x 90mm (7 1/8" x 7 1/8" x 3 1/2")

Umweltbedingungen

Operating temperature 0 to +50°C
(max)

Relative humidity 0% to 95% (Max 75% RH for <75m cable & 54°C alarm setting)

IP rating IP66


IK rating IK08

Detection

Ambient Temperature upAlarm Temperature - 54°C to 30°C

Ambient Temperature upAlarm Temperatures - 64°C / 72°C / 79°C to 47°C

Ambient Temperature upAlarm Temperatures - 86°C / 100°C to 69°C

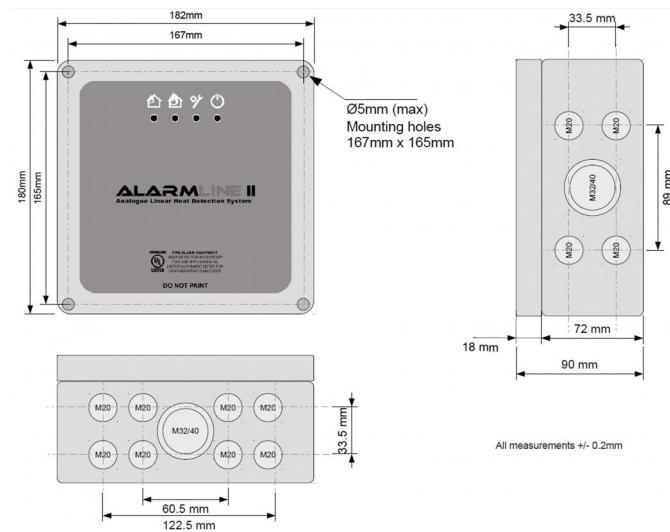

All measurements +/- 0.2mm